


EPSON i1600 Double head



A3 DTF Printer LF-370i

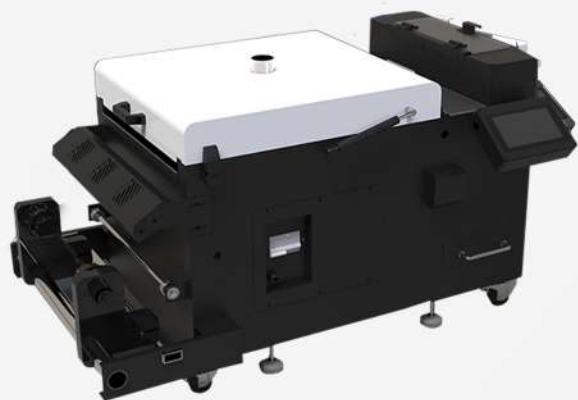

DTF Powder shaker LF-D400



DTF Purifier LF-30F

1. Configure i1600 dual head high-speed printing

2. Touch screen control, printing front and rear arc heating platform suction, LED lights

3. Suitable for maximum format 33CM PET hot stamping printing

4. Ultra high precision, wide color gamut bright and firm printing



Operation control method	A common key or button	Media width	0-380mm
Drying tunnel length	500mm	Drying tunnel configuration	stainless steel
Powder control	adjustable powder shaking intensity and powder dispensing amount	Winding function	Automatic induction winding
Cooling function	Ambient cooling	Drying power	2.2KW
Dimensions	1185X608X641 (mm)	Net weight	50Kg



▶ PRODUCT PARAMETERS

Print head	Epson-i1600
Number of heads	i1600 dual heads
Printing width	≤330mm
Printing color	CMYK+White
Printing media	PET film
Printing speed	8Pass 3m ² /H 12Pass 2m ² /H
Ink type	DTF pigment ink
Printing accuracy	1440/2160/2880dpi
Rip Software	Maintop/PP
PC Operating system	Win7、Win10
Heating and drying function	Printing front and rear arc heating platform suction, LED lights
Platform suction	Adjustable
Print Interface	Gigabit Ethernet port
Temperature and humidity	15 - 30°C 35-65%
Electrical parameters	50HZ/60HZ,220V 15A 0.5KW
Size and weight	machine: 795*330*442mm N.W 40KG package: 850*490*649mm G.W 60KG

- ◆ New A3 printer
- ◆ Printing width 0-33cm
- ◆ Touch Screen Control

