


60cm DTF Printer [8 color]

i3200-A1-3H

10m²/h



LF-740SF

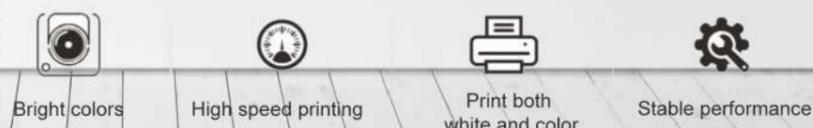

Contacts
Aimin: 139 2225 2289

集团总部: 广州黄埔区科学大道50号绿地中央广场A3栋901室
Group HQ: Rm.901 Bd.A3 Greenland Center Plaza of No.50
Science Avenue Huangpu Zone, Guangzhou City
Website: www.leafprinting.io
E-mail: Betty030318@126.com

皓叶国际
Bright Leaf International
皓叶国际集团荣誉出品
Honorably produced by Bright Leaf Int'l Group

Product Design Concept:

This is a high-end white ink hot stamping printer. Equipped with 3-i3200 sprinklers, it has a fully automatic configuration: automatic tension feeding, automatic circulation of white ink without power-off, electric lifting rod and other functions. The design style draws on traditional Chinese home furnishing elements, exquisite interface segmentation and black sand + matte green color decoration, highlighting the green environmental protection high-end elegant temperament.

Proprietary image quality control technology, the most excellent aesthetic sense. Original imported i3200 nozzle, accuracy up to 1800dpi, matching the proprietary board waveform and international color management icc curve, the printing quality is delicate, the shade is too natural, the sense of layering is prominent, the overall tension is rich in charming color beauty, effectively attracting the attention of the audience and enhancing the added value of the equipment.

Ingenious design, to achieve high-speed printing, high-quality output, unique core competitiveness. Equipped with two original imported i3200-A1 nozzles, with white color and high-speed printing, speed up to 8-10m²/h, suitable for small batch production of products.



Core functionality

- * Heating and drying function:
Before printing, rear arc plate heating, front guide plate heating.
- * Automatic feeding function:
Feeding system has probe induction, can automatically tension feeding.
- * Waste ink alarm function:
It automatically alarms when the waste ink bottle is full.
- * Lack of ink alarm function:
When the amount of ink in the ink bottle is too low, it will automatically alarm.
- * Automatic lever lifting and paper pressing function:
The platform will automatically lift the pressure rod with one touch when feeding.

- * Car anti-collision function:
The car is installed at both ends of the collision alarm emergency stop device.
- * Paper shortage alarm function:
Lack of paper will alarm and automatically stop printing.
- * Cycle stirring function:
White ink can be independently powered. Under the shutdown state can be timed and infinite circulation stirring.
- * Print platform lighting function:
Print platform LED lighting.
- * PC assembly function:
Come with computer and monitor combination bracket, can save space.

Parameters and Specifications

Model	LF-740SF		
Printhead type&quantity	i3200-A1&3 pcs	Printing width	≤600mm
Print configuration	Color+fluorescent color + white (CM K Y+FO FMFC FY+WWWW)	Print Media	PET film
Printing accuracy	1440/2160/2880dpi	Printing speed	6Pass 8 m ² /h 4Pass 10 m ² /h
RIP software	Maintop/PhotoPrint	Color management	ICC or density curve
Operate system	Win7、Win10	power input	50HZ/60HZ,220V15A
Platform suction	Adjustable suction	Net weight	150KG
Print interface	Gigabit Ethernet	Gross weight	210KG
Usage environment	15 - 30°C/35-65%	Machine size	1885mm*750mm*1654mm
Power	1.5KW	Package size	1920mm*1020mm*715mm(Printer)